





Plascore Board™ Performance Comparison

WEIGHT

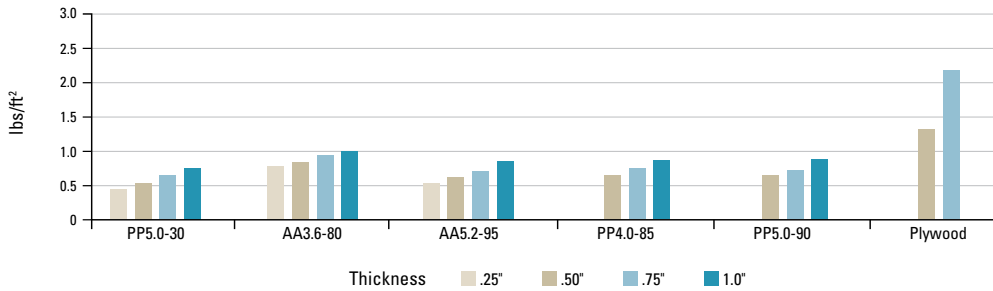

FLEXURAL RIGIDITY

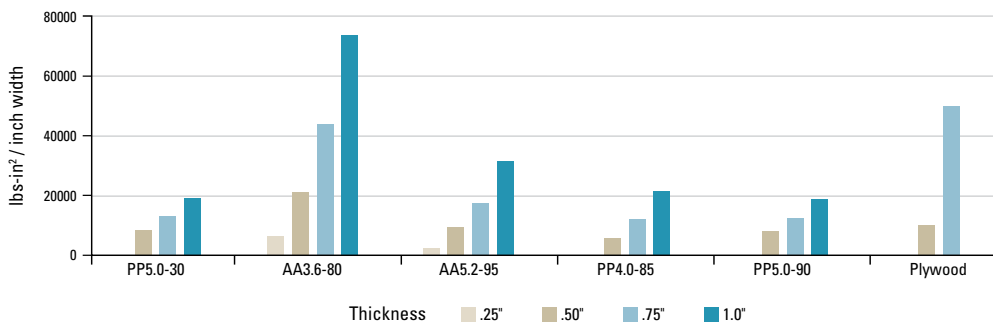


*Data obtained through testing in accordance with ASTM C393/C 393M-06 at a Four-Point, Quarter-Point Loading configuration and span of 20" @ 3" width, except .25" T @ 1.5" width.

Description:

Plascore Board™ is a lightweight, structural composite sandwich panel designed to add strength to primary and secondary structures ... while saving time and reducing labor on the production floor. Plascore Board is manufactured to tight tolerances and is easy to cut, shape and drill. Available in a range of honeycomb cores with performance facings, Plascore Board offers an exceptionally high strength-to-weight ratio, making these value-added panels an ideal substitute for Plywood in applications where weight reduction is required.

Designed to add value in OEM Product manufacturing, Plascore Board panels are available cut to a custom size or shape, or in a standard sheet size of 48" x 96" in a thickness of 1/2", 3/4" and 1".

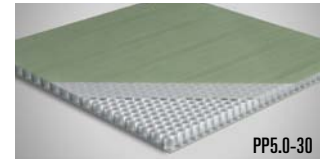

PP Honeycomb 5.0 pcf with 0/90 Fiberglass-PP Skin




Aluminum Honeycomb 3.6 pcf with .020" Aluminum



Aluminum Honeycomb 5.2 pcf with 0.18" Glass-Epoxy



PP Honeycomb 4.0 pcf with .059" Okume Plywood



PP Honeycomb 5.0 pcf with .014" Glass-Epoxy with Peel Ply

Plascore, Inc., employs a quality management system that is AS/EN/JISQ 9100, ISO 9001:2008 and ISO 14001:2004 certified.

IMPORTANT NOTICE: The information contained in these materials regarding Plascore's products, processes, or equipment, is intended to be up to date, accurate, and complete. However, Plascore cannot warrant that this is always the case. Accordingly, it is a purchaser's or user's responsibility to perform sufficient testing and evaluation to determine the suitability of Plascore's products for a particular purpose. Information in these materials and product specifications does not constitute an offer to sell. Your submission of an order to Plascore constitutes an offer to purchase which, if accepted by Plascore, shall be subject to Plascore's terms and conditions of sale. **PLASCORE MAKES NO WARRANTIES OF ANY KIND REGARDING THESE MATERIALS OR INFORMATION, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.** Plascore owns and shall retain all worldwide rights in its intellectual property, and any other trademarks used in these materials are the property of their respective owners. The information in these materials shall not be construed as an inducement, permission, or recommendation to infringe any patent or other intellectual property rights of any third parties.



Corporate Headquarters

Plascore Incorporated
615 N. Fairview St.
Zeeland, MI 49464-0170

Phone (616) 772-1220
Toll Free (800) 630-9257
Fax (616) 772-1289
Email sales@plascore.com
Web www.plascore.com

Europe

Plascore GmbH&CoKG
Feldborn 6
D-55444 Waldlaubersheim
Germany

Phone +49(0) 6707-9143 13
Fax +49(0) 6707-9143 40
Email sales.europe@plascore.com
Web www.plascore.de