


# SSH-301 & SSH-304 Stainless Steel Honeycomb

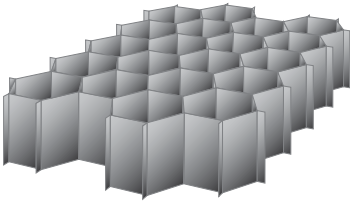

## Description:

---

SSH-301 and SSH-304 stainless steel honeycomb is adhesively-bonded which offers affordable pricing when compared against conventional welded stainless cores. SSH-304 honeycomb is made from annealed SS304.

## Applications:

---

Stainless steel honeycomb uses include joiner panels, bulkheads, train doors and floors or any areas where honeycomb is subjected to hostile environments.

## Features:

---

- Excellent moisture and corrosion resistance
- Flame resistance
- Fungi resistance

## Availability:

---


Stainless steel honeycomb is available in expanded, untrimmed sheets.

<b>Cell Sizes:</b>	3/8" - 1/2"
<b>Densities:</b>	5.3 pcf - 7.1 pcf
<b>Sheet "Ribbon" (L):</b>	48" typical
<b>Sheet "Transverse" (W):</b>	96" typical
<b>Tolerances:</b>	Length: + 6", - 0" Width: + 6", - 0" Thickness: ± .015" (under 4" thick) Density: ± 15% Cell Size: ± 15%

**NOTE:** Special sizes and can be provided upon request.

# SSH-301 & SSH-304 honeycomb is specified as follows:

Material - Density - Cell Size - Foil Thickness - Non-perforated - Alloy

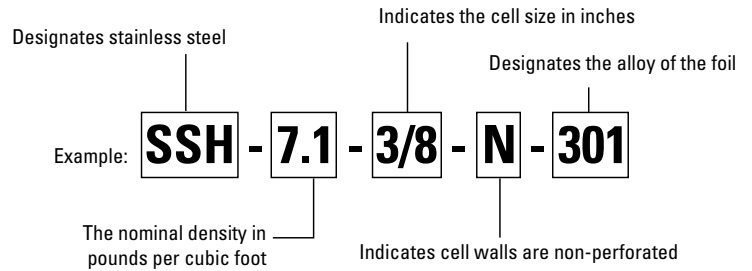

## SSH-301 & SSH-304 Mechanical Properties\*

PLASCORE® Honeycomb Designation			Bare Compressive		Plate Shear "L" Direction			Plate Shear "W" Direction		
CORE TYPE	CELL SIZE	DENSITY	STRENGTH PSI		STRENGTH PSI		MODULUS KSI	STRENGTH PSI		MODULUS KSI
			TYP	MIN	TYP	MIN		TYP	MIN	
SSH-301	3/8	7.1	350	245	290	203	112	150	116	60
SSH-301	1/2	5.3	239	167	196	137	81	109	84	45
SSH-304	3/8	7.1	214	150	207	145	77	110	77	43
SSH-304	1/2	5.3	145	102	140	98	58	78	55	32

\* Estimated or interpolated values based on limited testing per MIL-STD-401 at room temperature.

Note: The above data is based on variable sample sizes and is subject to change with continued manufacturing and testing of SSH honeycomb core blocks.

Plascore, Inc., employs a quality management system that is Nadcap, AS9100, ISO 9001 and ISO 14001 certified.

**IMPORTANT NOTICE:** The information contained in these materials regarding Plascore's products, processes, or equipment, is intended to be up to date, accurate, and complete. However, Plascore cannot warrant that this is always the case. Accordingly, it is a purchaser's or user's responsibility to perform sufficient testing and evaluation to determine the suitability of Plascore's products for a particular purpose. Information in these materials and product specifications does not constitute an offer to sell. Your submission of an order to Plascore constitutes an offer to purchase which, if accepted by Plascore, shall be subject to Plascore's terms and conditions of sale. PLASCORE MAKES NO WARRANTIES OF ANY KIND REGARDING THESE MATERIALS OR INFORMATION, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Plascore owns and shall retain all worldwide rights in its intellectual property, and any other trademarks used in these materials are the property of their respective owners. The information in these materials shall not be construed as an inducement, permission, or recommendation to infringe any patent or other intellectual property rights of any third parties.



### Corporate Headquarters

**Plascore Incorporated**  
 615 N. Fairview St.  
 Zeeland, MI 49464-0170  
 Phone (616) 772-1220  
 Toll Free (800) 630-9257  
 Fax (616) 772-1289  
 Email sales@plascore.com  
 Web www.plascore.com

### Europe

**Plascore GmbH&CoKG**  
 Feldborn 6  
 D-55444 Waldlaubersheim  
 Germany  
 Phone +49(0) 6707-9143 0  
 Fax +49(0) 6707-9143 40  
 Email sales.europe@plascore.com  
 Web www.plascore.de