


PAMG-PA3 5056 Aluminum Honeycomb

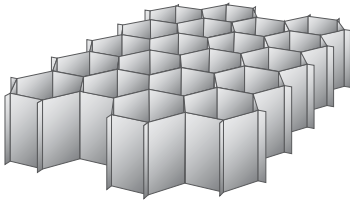

Description:

PAMG-PA3 5056 aerospace grade aluminum honeycomb is a lightweight phosphoric acid anodized core material which offers superior corrosion resistance and node bond strength over traditional organo-metallic coated aluminum honeycomb. PAMG-PA3 5056 honeycomb is made from 5056 aluminum alloy foil and meets all the requirements of AMS C7438 Rev A Class 1.

Applications:

PAMG-PA3 5056 honeycomb uses include aircraft nacelles, aircraft leading and trailing edges, launcher structures, fan casings, fuel cells, fuselage components, and satellite structures. PAMG-PA3 5056 honeycomb is suitable for applications where materials conforming to AMS C7438 Rev A Class 1 are required.

Features:

- Elevated use temperatures
- High thermal conductivity
- Flame resistant
- Excellent moisture and corrosion resistance
- Fungi resistant
- Low weight / High strength
- Improved node bond strength for increased formability

Availability:

PAMG-PA3 5056 honeycomb is available in four forms: unexpanded blocks, unexpanded slices, untrimmed expanded sheets and cut to size expanded sheets. It is also available with or without cell perforations to facilitate cell venting for certain applications. Plascore PAMG-PA3 honeycomb is currently not available for 0.0007" foil.

Cell Sizes:	1/8" - 3/8"
Densities:	2.3 pcf - 8.1 pcf
Sheet "Ribbon" (L):	48" typical - 72" max
Sheet "Transverse" (W):	96" typical - 200" max
Sheet Thickness (T):	20"/34" max
Tolerances:	Length: + 6", - 0"
	Width: + 6", - 0"
	Thickness: ± .005" (under 4" thick)
	± .062" (over 4" thick)
	Density: ± 10%
	Cell Size: ± 10%


NOTE: Special dimensions, sizes, tolerances, CNC machining and die cut to size can be provided upon request.

Corrosion Resistance:

The anodized PA3 coating offers excellent protection for honeycomb cores exposed to corrosive environments, meeting the requirements of AMS C7438 Rev A, CL1.

PAMG-PA3 5056 honeycomb is specified as follows:

Trade Name - Corrosion Coating - Density - Cell Size - Foil Gauge - Perforation - Alloy

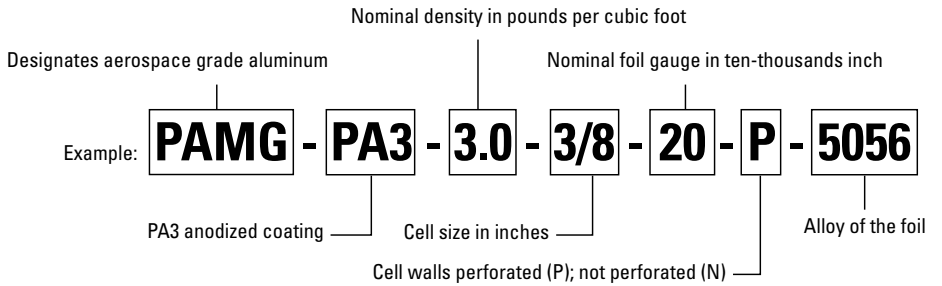

PAMG-PA3 5056 Mechanical Properties

			Bare Compressive - typical*		Plate Shear - typical*			
CELL SIZE inch	NOMINAL FOIL GAUGE inch	NOMINAL DENSITY PCF	STRENGTH PSI	MODULUS KSI	STRENGTH PSI		MODULUS KSI	
					"L"	"W"	"L"	"W"
1/8	.001	4.5	630	185	425	255	70	38
1/8	.0015	6.1	1000	295	640	370	102	38
1/8	.002	8.1	1520	435	900	520	143	51
3/16	.001	3.1	340	97	255	155	45	20
3/16	.0015	4.4	600	180	410	245	68	27
3/16	.002	5.7	910	270	585	340	94	36
1/4	.001	2.3	205	58	170	105	32	15
1/4	.0015	3.4	395	115	290	175	50	22
1/4	.002	4.3	580	172	400	240	67	27
1/4	.0025	5.2	790	230	500	300	84	32
3/8	.001	1.6	100	30	90	60	20	12
3/8	.0015	2.3	205	58	170	105	32	15
3/8	.002	3.0	320	92	245	145	43	19

Tested at 0.625" per AMS C7438 Rev A at room temperature.

*Minimum values may be up to 25% lower than typical values.



Plascore, Inc., employs a quality management system that is Nadcap, AS9100, ISO 9001 and ISO 14001 certified.

IMPORTANT NOTICE: The information contained in these materials regarding Plascore's products, processes, or equipment, is intended to be up to date, accurate, and complete. However, Plascore cannot warrant that this is always the case. Accordingly, it is a purchaser's or user's responsibility to perform sufficient testing and evaluation to determine the suitability of Plascore's products for a particular purpose. Information in these materials and product specifications does not constitute an offer to sell. Your submission of an order to Plascore constitutes an offer to purchase which, if accepted by Plascore, shall be subject to Plascore's terms and conditions of sale. PLASCORE MAKES NO WARRANTIES OF ANY KIND REGARDING THESE MATERIALS OR INFORMATION, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Plascore owns and shall retain all worldwide rights in its intellectual property, and any other trademarks used in these materials are the property of their respective owners. The information in these materials shall not be construed as an inducement, permission, or recommendation to infringe any patent or other intellectual property rights of any third parties.



Corporate Headquarters

Plascore Incorporated
 615 N. Fairview St.
 Zeeland, MI 49464-0170
 Phone (616) 772-1220
 Toll Free (800) 630-9257
 Fax (616) 772-1289
 Email sales@plascore.com
 Web www.plascore.com

Europe

Plascore GmbH&CoKG
 Feldborn 6
 D-55444 Waldlaubersheim
 Germany
 Phone +49(0) 6707-9143 0
 Fax +49(0) 6707-9143 40
 Email sales.europe@plascore.de
 Web www.plascore.de