





Honeycomb Core

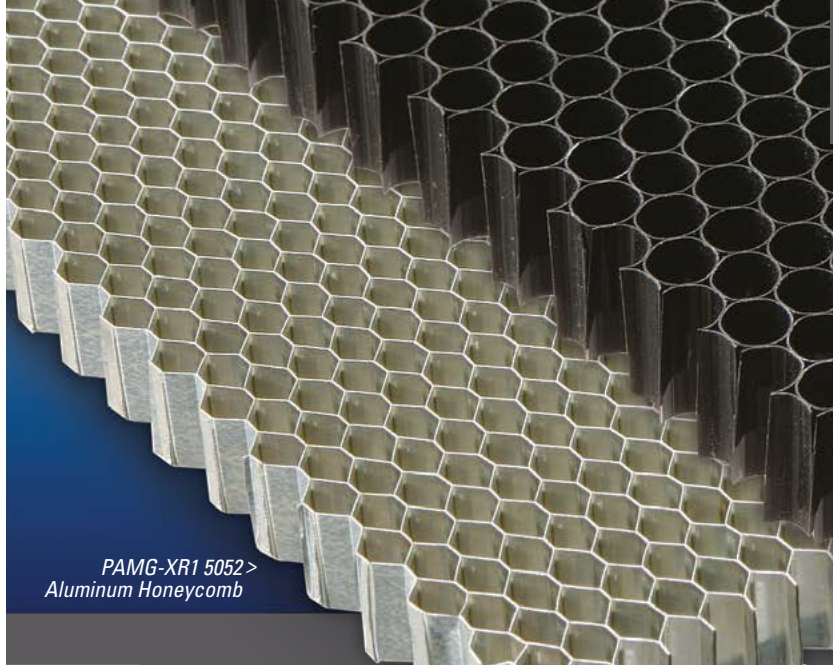

PAMG-XR1 5052 >  
Aluminum Honeycomb

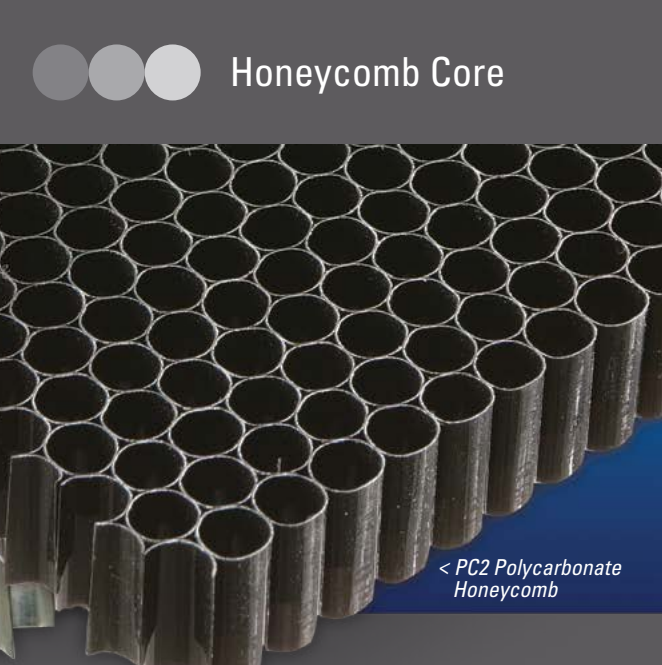

< PC2 Polycarbonate  
Honeycomb

# FlowCore™

## Honeycomb Core Engineered for Air, Fluid and Light Flow

Plascore Aluminum and PC2 Honeycomb cores are used in various applications for straightening, directing and filtering air, fluid and light flow. With its open cell structure, often exceeding 95%, Plascore honeycomb cores allow maximum flow with minimal resistance.

Plascore honeycomb cores are lightweight for easy handling, yet exhibit tough, impact-resistant qualities, making them ideal solutions for air, fluid and light flow:

- Turbulent to Laminar
- Redirect
- Focus / Concentrate

### Applications

- Wind Tunnels
- Refrigerated Cases
- HVAC
- Wave Pools
- Fuel Filters
- Fountains
- Fluid Baffles
- Lighting & Photography Filters
- Directional Stage Lighting
- Skylights



PLASCORE®

## PC2 Polycarbonate Availability


PC2 polycarbonate honeycomb is typically used for water, air and light flow applications. It is typically unaffected by moisture and is available in the following cell sizes.

Cell Size	1/8	1/4	3/8	1/2
Density	5.0	4.0	5.0	5.0
% Open*	70	80	85	95

\* Effective open area

**PC2 polycarbonate honeycomb is specified as follows:**

Material - Cell Size - Color - Thickness

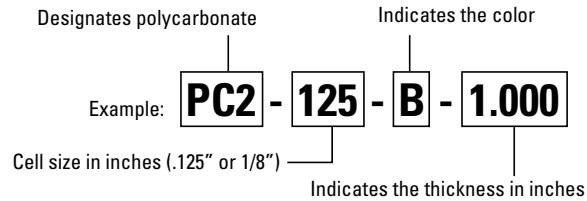

## PCGA-XR2 3003 Availability


PCGA-XR2 3003 honeycomb is typically used in higher velocity wind tunnels and lighting applications and is available in four forms: unexpanded blocks, unexpanded slices, untrimmed expanded sheets and cut to size expanded sheets. It is also available with or without cell perforations to facilitate cell venting for certain applications.

Cell Size	1/4	3/8	1/2	3/4	1.0
Density	5.2	3.6	2.5	1.8	1.4
% Open*	95 or higher				

\* Effective open area

**PCGA-XR2 3003 commercial grade aluminum honeycomb is specified as follows:**

Trade Name - Corrosion Coating - Density - Cell Size - Foil Gauge - Perforation - Alloy

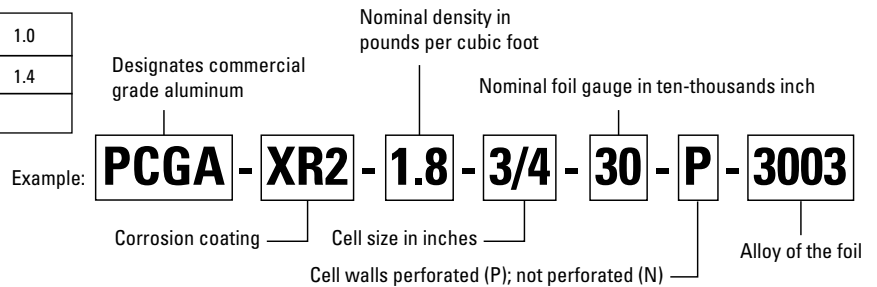

## PAMG-XR1 5052 Availability


PAMG-XR1 5052 honeycomb is typically used in Fluid Flow applications and is available in four forms: unexpanded blocks, unexpanded slices, untrimmed expanded sheets and cut to size expanded sheets. It is also available with or without cell perforations to facilitate cell venting for certain applications.

Cell Size	1/16	1/8
Density	12.0	4.5
% Open*	90	95

\* Effective open area

**PAMG-XR1 5052 aluminum honeycomb is specified as follows:**

Trade Name - Corrosion Coating - Density - Cell Size - Foil Gauge - Perforation - Alloy

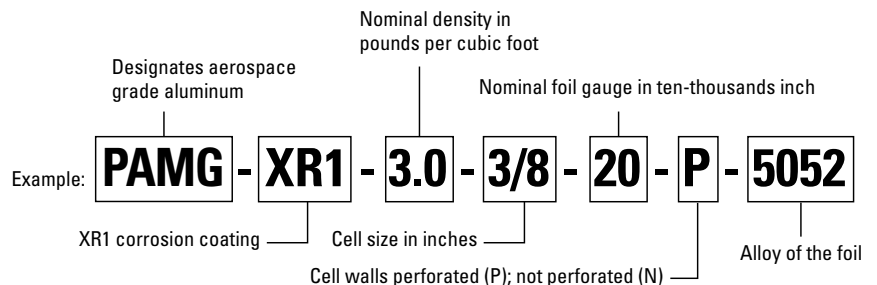

Plascore, Inc., employs a quality management system that is Nadcap, AS9100, ISO 9001 and ISO 14001 certified.

**IMPORTANT NOTICE:** The information contained in these materials regarding Plascore's products, processes, or equipment, is intended to be up to date, accurate, and complete. However, Plascore cannot warrant that this is always the case. Accordingly, it is a purchaser's or user's responsibility to perform sufficient testing and evaluation to determine the suitability of Plascore's products for a particular purpose. Information in these materials and product specifications does not constitute an offer to sell. Your submission of an order to Plascore constitutes an offer to purchase which, if accepted by Plascore, shall be subject to Plascore's terms and conditions of sale. **PLASCORE MAKES NO WARRANTIES OF ANY KIND REGARDING THESE MATERIALS OR INFORMATION, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.** Plascore owns and shall retain all worldwide rights in its intellectual property, and any other trademarks used in these materials are the property of their respective owners. The information in these materials shall not be construed as an inducement, permission, or recommendation to infringe any patent or other intellectual property rights of any third parties.



### Corporate Headquarters

**Plascore Incorporated**  
615 N. Fairview St.  
Zeeland, MI 49464-0170  
Phone (616) 772-1220  
Toll Free (800) 630-9257  
Fax (616) 772-1289  
Email sales@plascore.com  
Web www.plascore.com

### Europe

**Plascore GmbH&CoKG**  
Feldborn 6  
D-55444 Waldlaubersheim  
Germany  
Phone +49(0) 6707-9143 0  
Fax +49(0) 6707-9143 40  
Email sales.europe@plascore.com  
Web www.plascore.de