

TP Thermoplastic Panel



Description:

Plascore TP Panels are made from a Plascore Polypropylene (PP) Honeycomb core with Oriented or Random Chopped Glass reinforced polypropylene facing both sides.

PP Honeycomb density/cell size and facing thicknesses can be modified for specific performance needs. Various surface treatments can be applied for color, adhesive bonding and printing.

These Lightweight, Durable, Tough and Structural sandwich panels offer superior strength to weight ratios.

Applications:

Ideal for doors, floors, walls, tables, platforms, packaging, pallets, dividers, etc.

Lightweight replacement for plywood and foam-cored panels.

Features:

- Moisture and Chemical Resistance
- UV Resistance
- Vibration and Acoustical Dampening
- Thermoformable
- Recyclable
- Economical


Availability:

Thickness:	1/4" – 5"	± .03"
Length:	up to 144"	± 1/8"
Width:	up to 72"	± 1/8"
Finish:	Commercial (Bondable, Printable, Non Porous versions available)	

NOTE: PP Honeycomb density/cell size and facing thicknesses can be modified for specific performance needs. Various surface treatments can be applied for color, adhesive bonding and printing.

Thermoplastic (TP) Panel is specified as follows:

Material - Cell Size - Color - Thickness

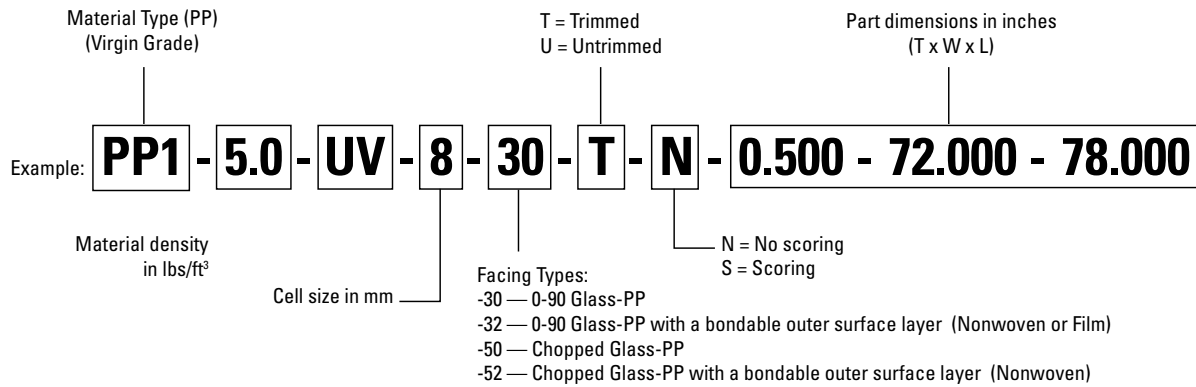

Typical (TP) Panel Mechanical Properties

PRODUCT ID	FACING TYPE	CORE TYPE	THICKNESS (INCHES)	WEIGHT (LBS/FT ²)	COMPRESSION ³ STRENGTH (PSI)	FLEXURAL RIGIDITY ⁴ (EI/INCH-WIDTH)
PP1-5.0-UV-8-30	.02" T ¹ 0-90 GLASS-PP	PP HONEYCOMB 5 PCF ²	0.25	0.36	275	1,100
			0.50	0.46	275	4,400
			0.75	0.56	275	10,000
			1.0	0.67	275	17,000
PP1-5.0-UV-8-50	.03" T ¹ CHOPPED GLASS-PP	PP HONEYCOMB 5 PCF ²	0.5	0.5	275	2,850
			0.75	0.6	275	6,500
			1.0	0.7	275	11,000

¹ Other facing thicknesses and weights available

² Other PP Honeycomb densities available

³ Per ASTM C365 (Stablized)

⁴ Per ASTM C393 (4 pt 1/4 pt, 20" span)



Plascore, Inc., employs a quality management system that is ISO 9001 and ISO 14001 certified.

IMPORTANT NOTICE: The information contained in these materials regarding Plascore's products, processes, or equipment, is intended to be up to date, accurate, and complete. However, Plascore cannot warrant that this is always the case. Accordingly, it is a purchaser's or user's responsibility to perform sufficient testing and evaluation to determine the suitability of Plascore's products for a particular purpose. Information in these materials and product specifications does not constitute an offer to sell. Your submission of an order to Plascore constitutes an offer to purchase which, if accepted by Plascore, shall be subject to Plascore's terms and conditions of sale. **PLASCORE MAKES NO WARRANTIES OF ANY KIND REGARDING THESE MATERIALS OR INFORMATION, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.** Plascore owns and shall retain all worldwide rights in its intellectual property, and any other trademarks used in these materials are the property of their respective owners. The information in these materials shall not be construed as an inducement, permission, or recommendation to infringe any patent or other intellectual property rights of any third parties.



Corporate Headquarters

Plascore Incorporated
 615 N. Fairview St.
 Zeeland, MI 49464-0170
 Phone (616) 772-1220
 Toll Free (800) 630-9257
 Fax (616) 772-1289
 Email sales@plascore.com
 Web www.plascore.com

Europe

Plascore GmbH&CoKG
 Feldborn 6
 D-55444 Waldlaubersheim
 Germany
 Phone +49(0) 6707-9143 13
 Fax +49(0) 6707-9143 40
 Email sales.europe@plascore.com
 Web www.plascore.de