



< PAMG-XR1 5052
Aluminum Honeycomb

EMI/RFI Shielding Vents

Electromagnetic Interference and Radio Frequency Interference Applications


Plascore offers several honeycomb cores for EMI / RFI Shielding vent panels. The open cell structure of honeycomb allows for maximum cooling air flow, while creating a barrier for reduced EM and RF emissions from electronic equipment. Plascore offers both corrosion coated and uncoated aluminum honeycomb, as well as a coatable polycarbonate honeycomb for this application. Plascore honeycomb can also be provided with its cell axis angled off the honeycomb surface plane at 30, 45 and 60 degrees. Die stamped, machined and cut to size capabilities are also offered.

Plascore honeycomb is available in a variety of cell size, densities and geometry that offers:

- Broad range of shielding effectiveness
- Increased air flow for improved component cooling
- Minimized pressure drop
- Damage tolerance

Applications

- Telecommunication hardware
- Server Racks
- Amplifiers
- Storage Cabinets
- Personal Computers
- Room Enclosures
- Fans

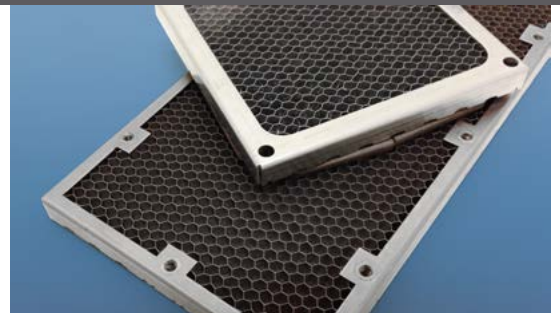


PAMG-XR1 5052 aluminum honeycomb is specified as follows:

Trade Name - Corrosion Coating - Density - Cell Size - Foil Gauge - Perforation - Alloy

Cell Size	1/16	1/8
Density	12.0	4.5

Product Availability:

- 1/8" cell, 6.1 and 8.1 pcf typical
- 1/8" cell, Perf or Non Perf
- 1/16" cell, 12.0 pcf typical up to 48" x 48" sheet sizes
- Corrosion or No Corrosion coating
- Max Sheet sizes on Angled cuts:
45 degree: 24" x 48"
30 and 60 degree: 20" x 48"

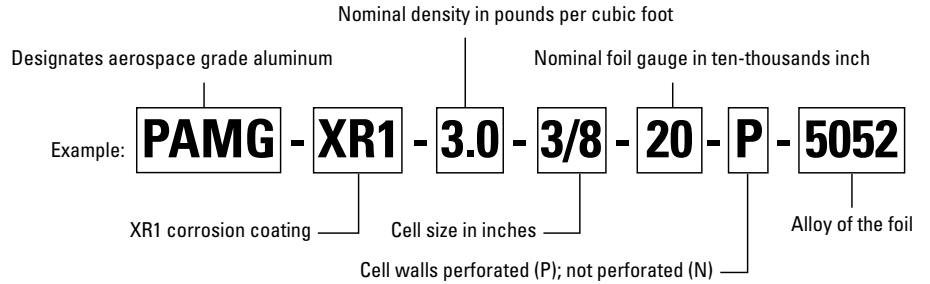


PC2 Polycarbonate Availability

Cell Size	1/8	1/4	3/8	1/2
Density	5.0	4.0	5.0	5.0

PC2 polycarbonate honeycomb is specified as follows:

Material - Cell Size - Color - Thickness

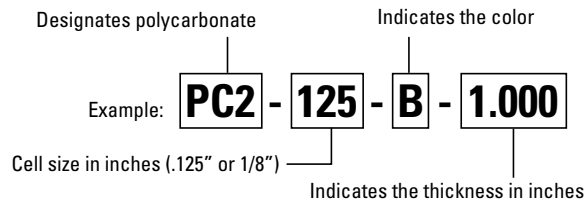

Plascore, Inc., employs a quality management system that is Nadcap, AS9100, ISO 9001 and ISO 14001 certified.

IMPORTANT NOTICE: The information contained in these materials regarding Plascore's products, processes, or equipment, is intended to be up to date, accurate, and complete. However, Plascore cannot warrant that this is always the case. Accordingly, it is a purchaser's or user's responsibility to perform sufficient testing and evaluation to determine the suitability of Plascore's products for a particular purpose. Information in these materials and product specifications does not constitute an offer to sell. Your submission of an order to Plascore constitutes an offer to purchase which, if accepted by Plascore, shall be subject to Plascore's terms and conditions of sale. **PLASCORE MAKES NO WARRANTIES OF ANY KIND REGARDING THESE MATERIALS OR INFORMATION, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.** Plascore owns and shall retain all worldwide rights in its intellectual property, and any other trademarks used in these materials are the property of their respective owners. The information in these materials shall not be construed as an inducement, permission, or recommendation to infringe any patent or other intellectual property rights of any third parties.



Corporate Headquarters

Plascore Incorporated
615 N. Fairview St.
Zeeland, MI 49464-0170
Phone (616) 772-1220
Toll Free (800) 630-9257
Fax (616) 772-1289
Email sales@plascore.com
Web www.plascore.com

Europe

Plascore GmbH&CoKG
Feldborn 6
D-55444 Waldlaubersheim
Germany
Phone +49(0) 6707-9143 0
Fax +49(0) 6707-9143 40
Email sales.europe@plascore.de
Web www.plascore.de